
Single row cylindrical roller bearings

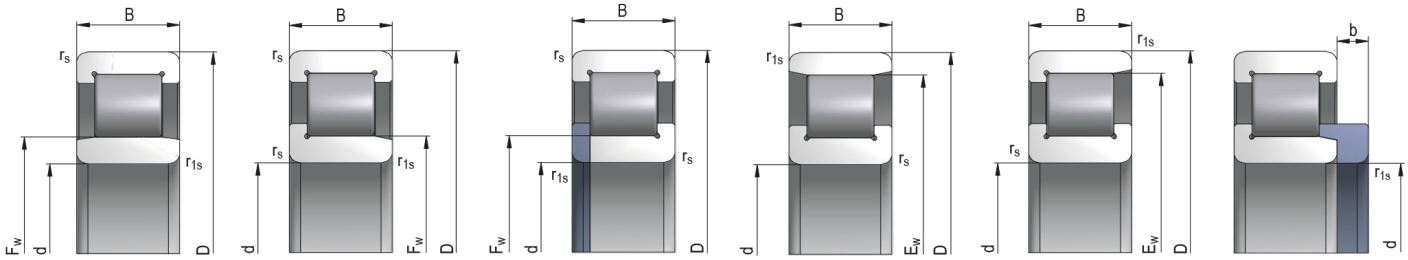

Bearing Designation	NU2326M

Dimensions (mm)

d	130
D	280
B	93
r_s min	4
r_{1s} min	4

Abutment and Fillet Dimensions (mm)

F_w	167	D_a max	264
E_w	-	D_a min	-
d_a min	146	r_a max	3
d_a max	163	r_b max	3
		b	14

Basic Load Rating (kN)

C	806,46
C_0	1067,86

Limiting Speed for Lubrication (min^{-1})

Grease	1900
Oil	2400

Angle Ring	HJ2326
Weight [kg]	29,00
Weight - K [kg]	1,7

ZVL SLOVAKIA, a.s. • Na stanicu 22 • 010 09 Žilina • Slovakia
phone.: +421 41 707 60 32 • fax: +421 41 707 60 24
sales.zvl@zvlslovakia.sk • www.zvlslovakia.sk

Tolerance Class

Tolerance Class	Inner Ring									
	Cylindrical Bore									
	Δ_{dmp}		V_{dp}			V_{dmp}	K_{ia}	Δ_{B_s}		V_{B_s}
			Diameter Series							
			7,8,9	0,1	2,3,4					
	max	min	max	max	max	max	max	max	min	max
	µm									
P0	0	-25	31	31	19	19	30	0	-250	30
P6	0	-18	23	23	14	14	18	0	-250	30

Tolerance Class	Inner Ring									
	Tapered Bore 1:12					Tapered Bore 1:30				
	Δ_{dmp}		$\Delta_{d1mp} - \Delta_{dmp}$		V_{dp} [1]	Δ_{dmp}		$\Delta_{d1mp} - \Delta_{dmp}$		V_{dp} [1]
	max	min	max	min	max	max	min	max	min	max
	µm									
P0	40	0	40	0	31	25	0	40	0	40

Tolerance Class	Outer Ring								
	Δ_{Dmp}		V_{Dp}			bearings [2] with seals	V_{Dmp}	K_{ea}	Δ_{CS}, V_{CS}
			Diameter Series						
			7,8,9	0,1	2,3,4				
	max	min	max	max	max	max	max	max	
	µm								
P0	0	-35	44	44	26	-	26	60	Corresponds to Δ_{BS}, V_{BS} of the same bearing inner ring
P6	0	-25	31	31	19	-	19	30	

1) Valid in any bore radial plane

2) P0 - Valid only for bearings in diameter series 2, 3 and 4 * P6 - Valid only for bearings in diameter series 0, 1, 2, 3 and 4

Radial Clearance - Cylindrical Bore

C2		normal		C3		C4		C5	
min	max	min	max	min	max	min	max	min	max
µm									
15	60	60	105	100	145	145	190	200	245

ZVL SLOVAKIA, a.s. • Na stanicu 22 • 010 09 Žilina • Slovakia
phone.: +421 41 707 60 32 • fax: +421 41 707 60 24
sales.zvl@zvlslovakia.sk • www.zvlslovakia.sk

Tolerance Symbols and Their Meaning

- d nominal bore diameter
- d_1 nominal diameter of larger theoretical tapered bore diameter
- d_2 nominal diameter of the shaft washer of double direction thrust bearings
- Δ_{ds} deviation of single bore diameter from nominal
- Δ_{dmp} mean cylindrical bore diameter deviation in single radial plane (for tapered bore Δ_{dmp} is valid for theoretical bore diameter)
- Δ_{d1mp} deviation of mean larger theoretical diameter of tapered bore
- Δ_{d2mp} mean shaft washer bore diameter deviation of double direction thrust bearings in single radial plane
- V_{dp} single bore diameter variation in single radial plane
- V_{dmp} mean cylindrical bore diameter variation
- V_{d2p} shaft washer bore diameter variation of double direction thrust bearings in single radial plane
- D nominal outside diameter
- Δ_{Ds} deviation of single outside diameter from the nominal dimension
- Δ_{Dmp} mean outside cylindrical surface diameter deviation in single plane
- V_{Dp} single outside cylindrical surface diameter variation in single radial plane
- V_{Dmp} mean outside cylindrical surface diameter variation
- B inner ring nominal width
- T total nominal width of tapered roller bearings
- T_1 nominal effective width of cup sub-unit
- T_2 nominal effective width of cone sub-unit
- H rated width of unidirectional axial bearing
- H_1 rated height of unidirectional ball axial bearing including the body ring
- H_2 rated height of bidirectional axial bearing
- H_3 rated height of bidirectional axial ball bearing including body rings
- H_4 rated height of spherical-roller bearing
- Δ_{Bs} inner ring single width deviation
- Δ_{Cs} outer ring single width deviation
- Δ_{Ts} bearing single width deviation (total)
- Δ_{T1s} cone sub-unit effective width deviation
- Δ_{T2s} cup sub-unit effective width deviation
- Δ_{Hs} height deviation of single direction axial bearings from nominal value
- Δ_{H1s} height deviation of single direction axial ball bearings with sphered housing washer from nominal value
- Δ_{H2s} height deviation of double direction axial bearings from nominal value
- Δ_{H3s} height deviation of double direction axial ball bearings with sphered housing washer from nominal value
- Δ_{H4s} height deviation of axial spherical-roller bearing from the rated value
- C outer ring nominal width
- V_{Bs} inner ring single width variation
- V_{Cs} outer ring single width variation
- K_{ia} radial runout of assembled bearing inner ring
- K_{ea} radial runout of assembled bearing outer ring
- S_i shaft washer raceway axial runout
- S_e housing washer raceway axial runout
- S_{ia} inner ring flat seat face axial runout of assembled bearing
- S_{ea} outer ring flat seat face axial runout of assembled bearing
- S_d flat seat face axial runout
- S_D runout of outside cylindrical surface towards outer ring face
- S_s runout of supporting face towards seat face for single row tapered roller bearings

ZVL SLOVAKIA, a.s. • Na stanicu 22 • 010 09 Žilina • Slovakia
phone.: +421 41 707 60 32 • fax: +421 41 707 60 24
sales.zvl@zvlslovakia.sk • www.zvlslovakia.sk