


Alignment needle roller bearings with inner ring

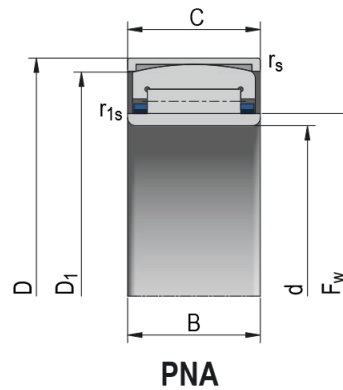

Bearing Designation **PNA 20/42**

Dimensions (mm)

| | |
|----------------|------|
| d | 20 |
| F _w | 25,0 |
| D | 42 |
| C | 20 |

| | |
|---------------------|-------|
| D _{1 min} | 36,50 |
| r _{s min} | 1 |
| r _{1s min} | 0,30 |
| s ¹ | 0,50 |

Basic Load Rating (kN)

| | |
|----------------|-------|
| C | 18,80 |
| C ₀ | 30,50 |

Limiting Speed for Lubrication (min⁻¹)

| | |
|-----|-------|
| Oil | 18000 |
|-----|-------|

Weight [g] **136,00**