



Drawn cup needle roller bearings

with open ends, closed ends, sealed, with cage

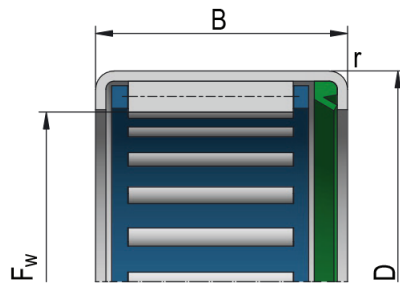

HK...RS

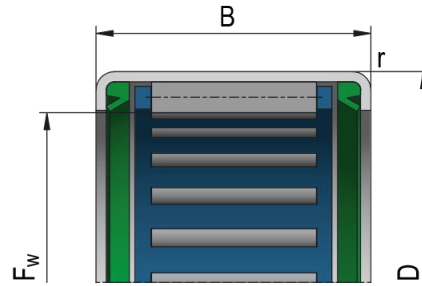

HK...2RS

| | | | |
|---------------------|------------|------|---------------|
| Bearing Designation | HK1816-2RS | Ring | IR 15x18x16,5 |
|---------------------|------------|------|---------------|

Dimensions (mm)

| | | | |
|-------|------|-----------|---|
| d | 18 | r_{min} | 1 |
| F_w | 18,0 | | |
| D | 24 | | |
| B | 16 | | |

Basic Load Rating (kN)

| | |
|-------|-------|
| C | 8,10 |
| C_0 | 10,90 |

Limiting Speed for Lubrication (min^{-1})

| | |
|--------|------|
| Grease | 9500 |
| Oil | 9500 |

| | |
|------------|-------|
| Weight [g] | 17,00 |
|------------|-------|