



# Drawn cup needle roller bearings

with open ends, closed ends, sealed, with cage

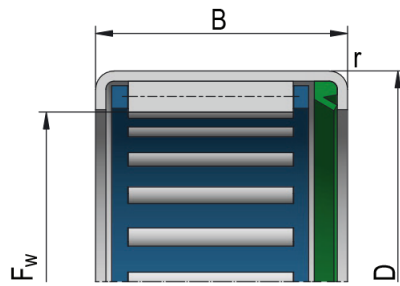

HK...RS

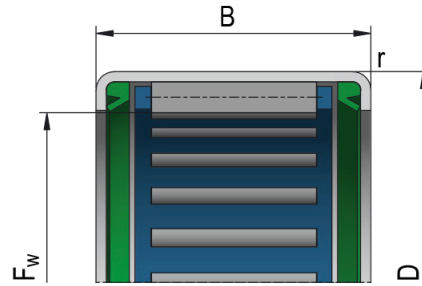

HK...2RS

|                     |          |      |             |
|---------------------|----------|------|-------------|
| Bearing Designation | HK1414RS | Ring | IR 10x14x16 |
|---------------------|----------|------|-------------|

## Dimensions (mm)

|       |      |           |   |
|-------|------|-----------|---|
| d     | 14   | $r_{min}$ | 1 |
| $F_w$ | 14,0 |           |   |
| D     | 20   |           |   |
| B     | 14   |           |   |

## Basic Load Rating (kN)

|       |      |
|-------|------|
| C     | 7,10 |
| $C_0$ | 8,50 |

## Limiting Speed for Lubrication ( $min^{-1}$ )

|        |       |
|--------|-------|
| Grease | 11000 |
| Oil    | 11000 |

|            |       |
|------------|-------|
| Weight [g] | 12,00 |
|------------|-------|